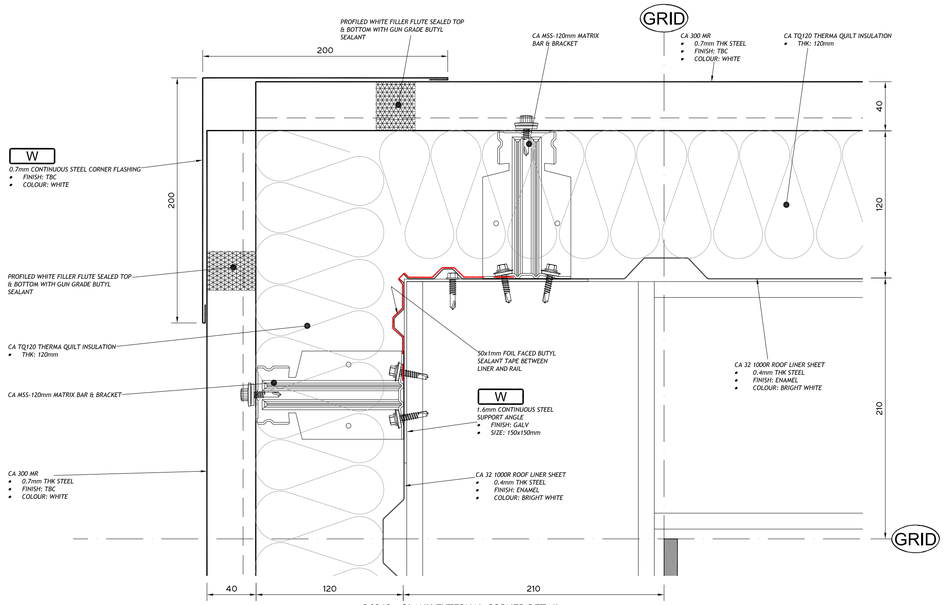

D03/3 - PLANK EXTERNAL CORNER DETAIL
1:2.5

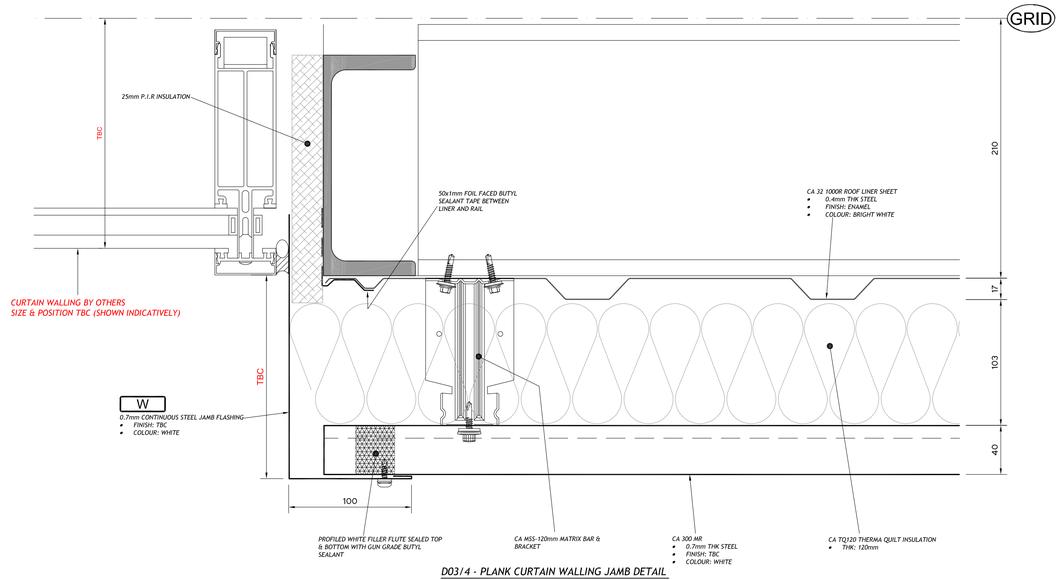

D03/4 - PLANK CURTAIN WALLING JAMB DETAIL
1:2.5

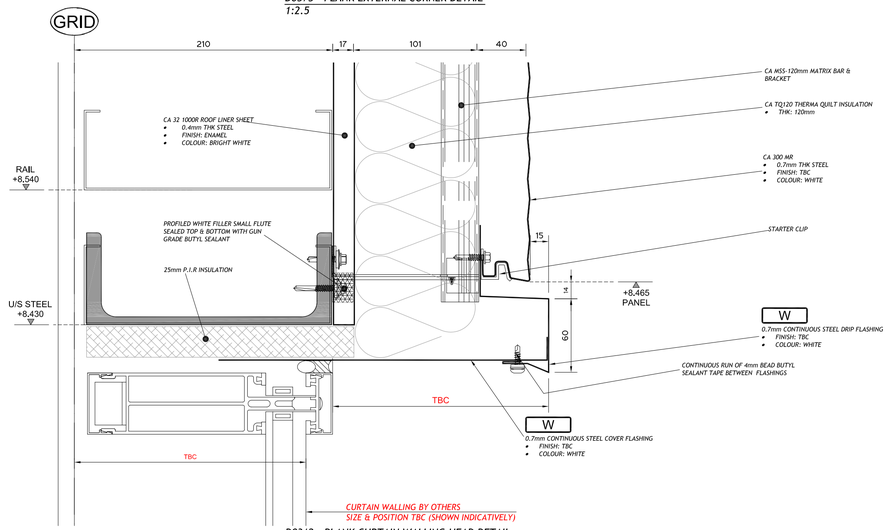

D03/2 - PLANK CURTAIN WALLING HEAD DETAIL
1:2.5

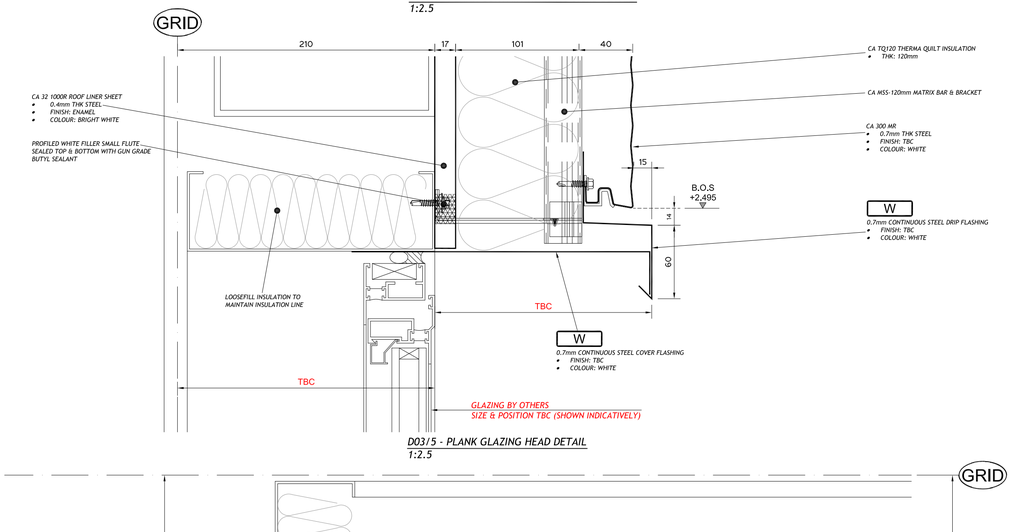

D03/5 - PLANK GLAZING HEAD DETAIL
1:2.5

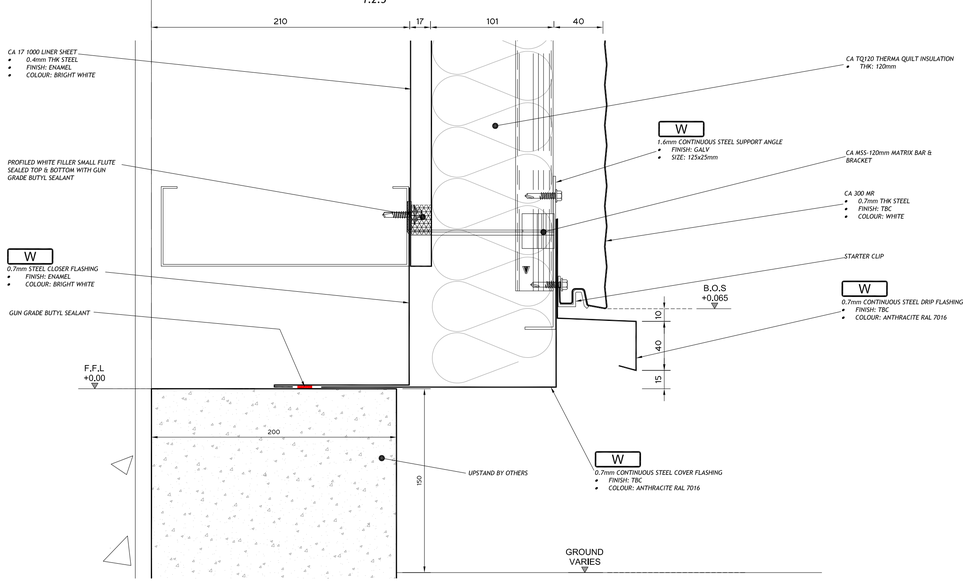

D08/1 - PLANK CLADDING BASE DETAIL
1:2.5

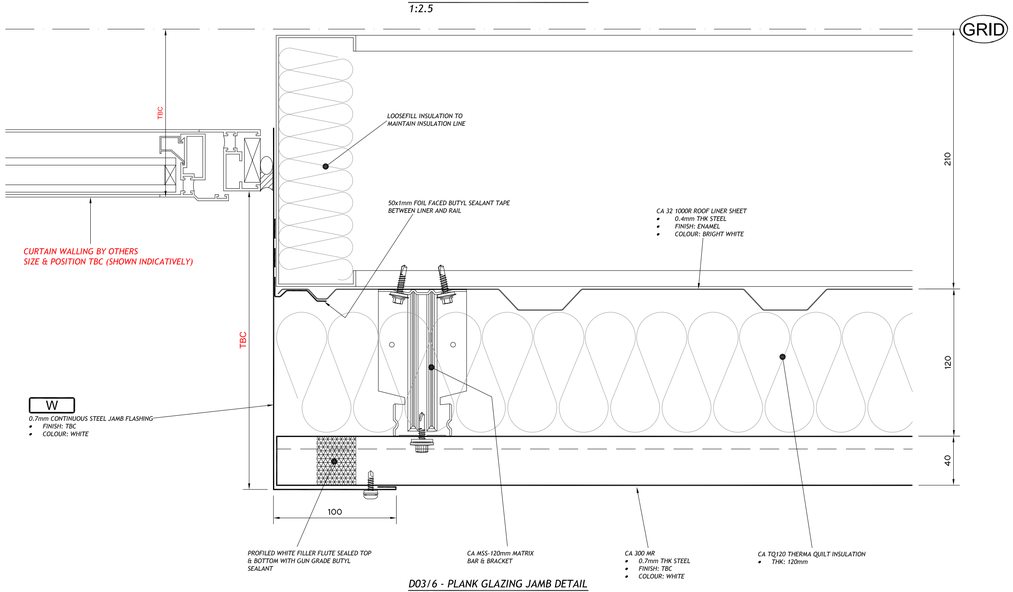

D03/6 - PLANK GLAZING JAMB DETAIL
1:2.5

Notes:

Architect to Confirm Colours as Highlighted Below.

WALL SYSTEMS TO ACHIEVE A 0.35 W/M²K "U VALUE"

TWIN SKIN BUILD UP:

WALL LINER - CA 17 1000 LINER SHEET
- *0.4mm THK STEEL*
- *FINISH: ENAMEL*
- *COLOUR: BRIGHT WHITE*

BRACKET - CA MSS-120mm MATRIX BAR & BRACKET

INSULATION - CA TQ120 THERMA QUILT INSULATION
- *THK: 120mm*
- ALL TUCKED & LAPPED TIGHT - NO GAPS

WALL TOPSHEET - CA 32 1000R WALL SHEET
- *0.7mm THK STEEL*
- *FINISH: TBC*
- *COLOUR: ANTHRACITE RAL 7016*

CA MR300 BUILD UP:

WALL LINER - CA 17 1000 LINER SHEET
- *0.4mm THK STEEL*
- *FINISH: ENAMEL*
- *COLOUR: BRIGHT WHITE*

BRACKET - CA MSS-120mm MATRIX BAR & BRACKET

INSULATION - CA TQ120 THERMA QUILT INSULATION
- *THK: 120mm*
- ALL TUCKED & LAPPED TIGHT - NO GAPS

WALL PANEL - CA 300 MR
- *0.7mm THK STEEL*
- *FINISH: TBC*
- *COLOUR: WHITE*

ARC CLADDING BUILD UP:

WALL LINER - CA 17 1000 LINER SHEET
- *0.4mm THK STEEL*
- *FINISH: ENAMEL*
- *COLOUR: BRIGHT WHITE*

BRACKET - CA MSS-120mm MATRIX BAR & BRACKET

INSULATION - CA TQ120 THERMA QUILT INSULATION
- *THK: 120mm*
- ALL TUCKED & LAPPED TIGHT - NO GAPS

WALL TOPSHEET - CA ARC 50 930
- *0.7mm THK STEEL*
- *FINISH: TBC*
- *COLOUR: ALASKA GREY*

FLASHINGS:

ARCHITECT TO CONFIRM COLOURS ON DRAWINGS - FLASHINGS TO BE LISTED AT CONSTRUCITON STATUS

C1-ISSUED FOR CONSTRUCTION - 12 APR 18	AL	RFDP	
P1-ISSUED FOR APPROVAL - 22 MAR 18	AL	RFDP	
REVISION / AUTHOR / CHECKER			

DRAWN BY: AL

SCALE @ A1: 1:2.5

PROJECT TITLE: BURTON GATEWAY PHASE 2 - BG25-40

DRAWING TITLE: WALL DETAILS SHEET 2

STATUS: CONSTRUCTION

REV: C1

DRAWING NO: 445-D03

Drawing file: